

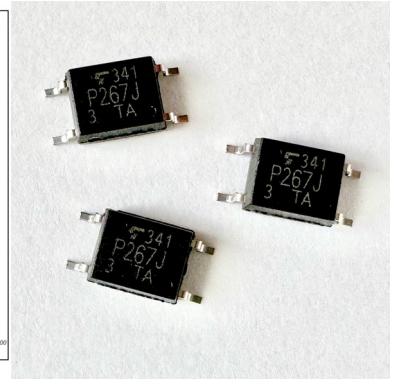


TLP267J Random-Phase TRIAC Driver Optocoupler Macro Model



On-State Characteristics

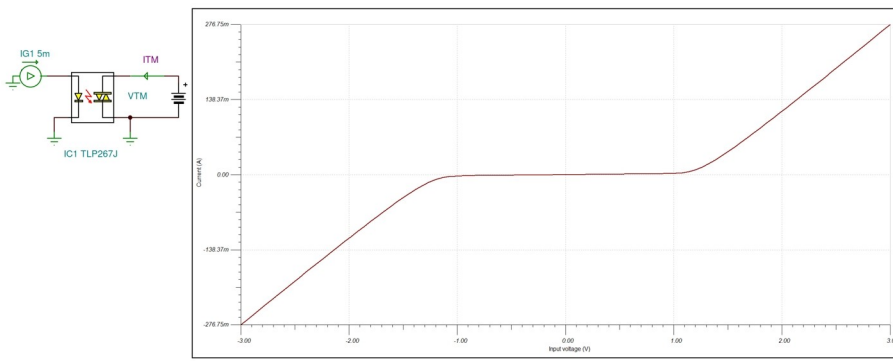


Transfer Characteristics

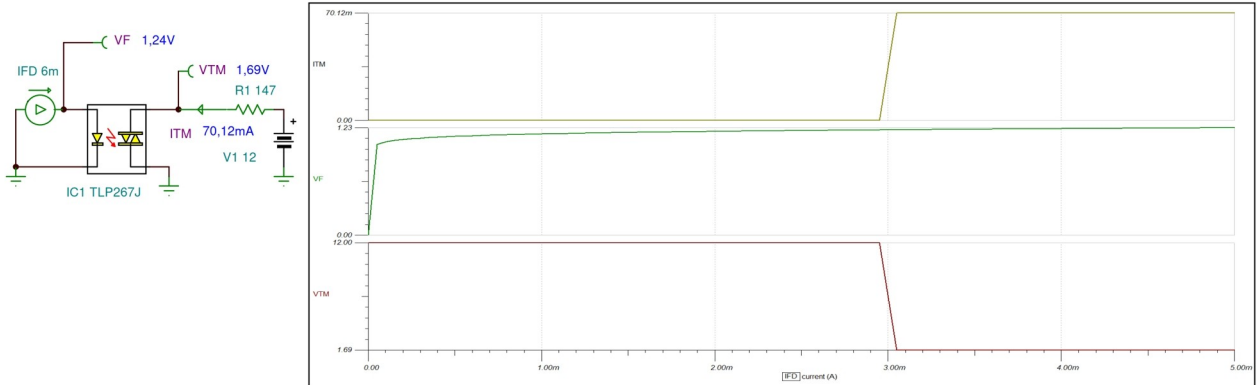

AC Characteristics

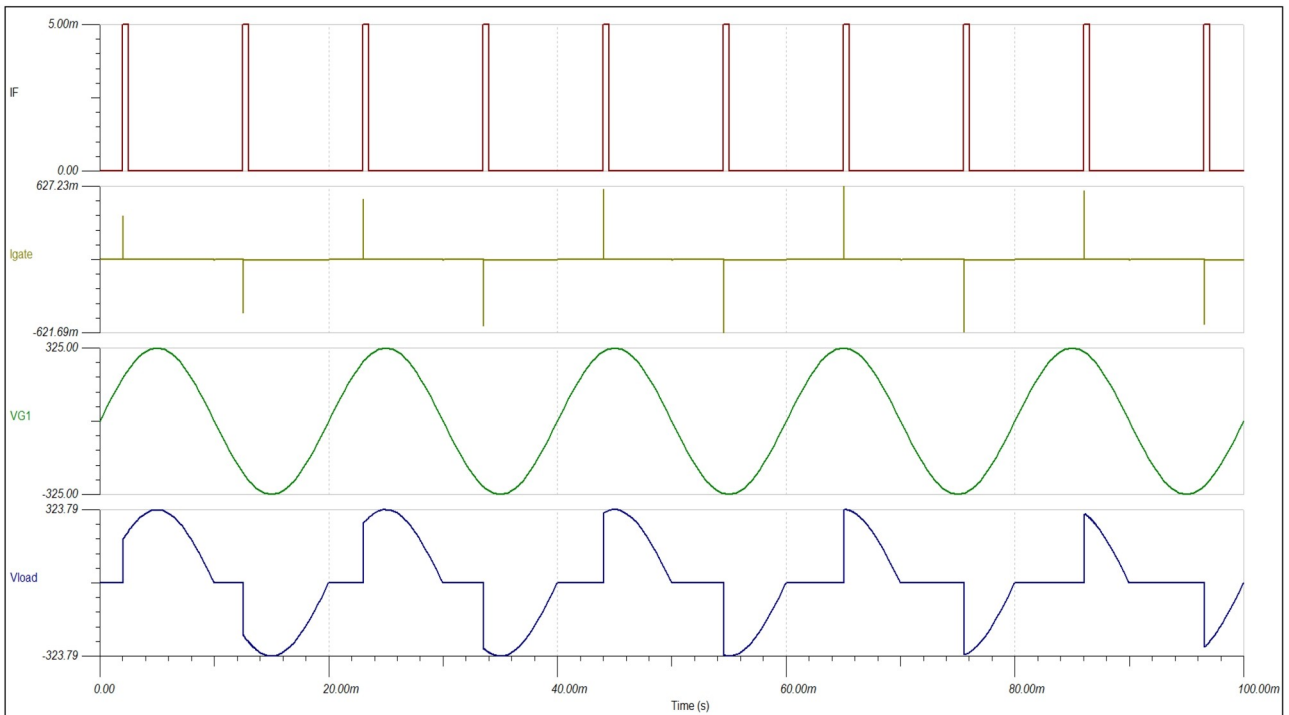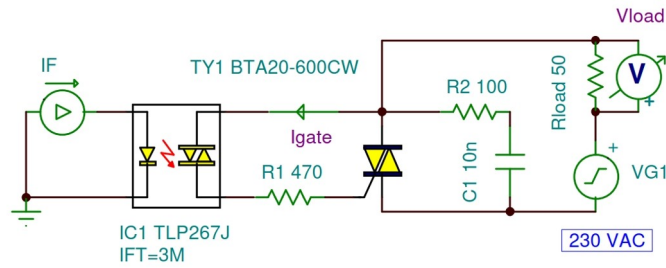

Turn-on Time

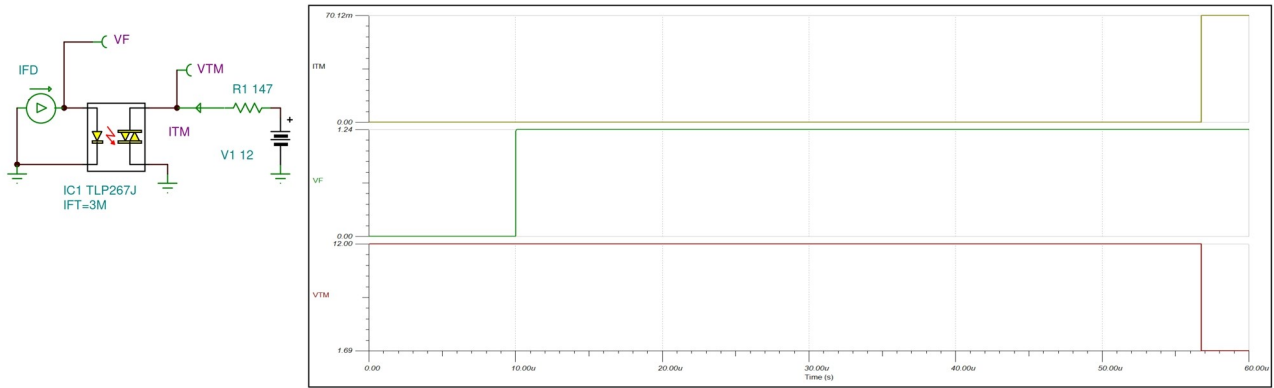

The turn-on time delay depends on the LED trigger current.

Single Snubber For Sensitive Gate TRIAC and Phase Controllable Optocoupler

